



CR-2032

DIMENSIONS (MM)

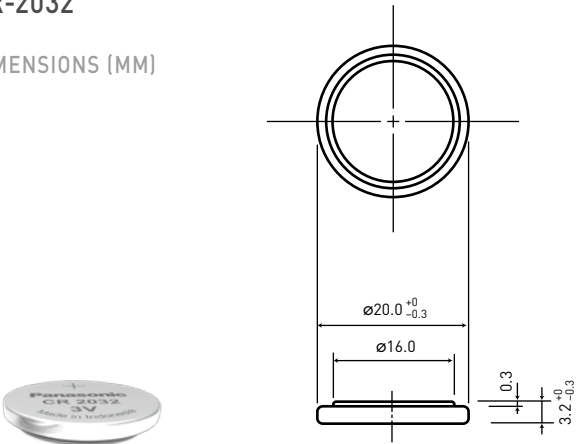


Model number	CR-2032
Nominal voltage (V)	3
Nominal capacity (mAh)	220
Diameter (mm)	20.0
Total height (mm)	3.2
Discharging temperature range (°C)	-30 to +60
Weight (g)	3.1


DISCHARGE TEMPERATURE CHARACTERISTICS

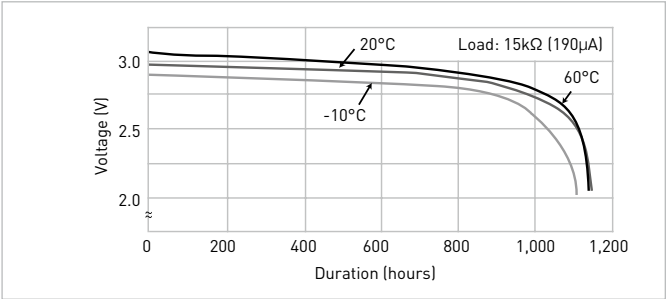

OPERATING VOLTAGE VS. DISCHARGE CURRENT*1

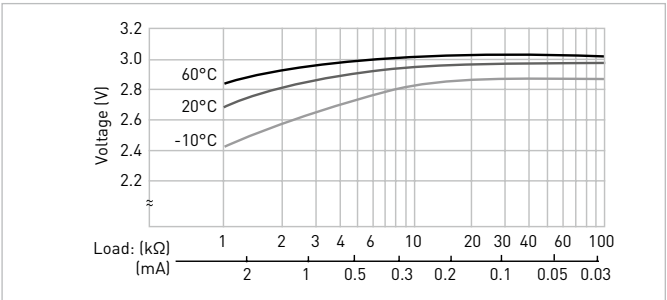


CAPACITY VS. LOAD RESISTANCE

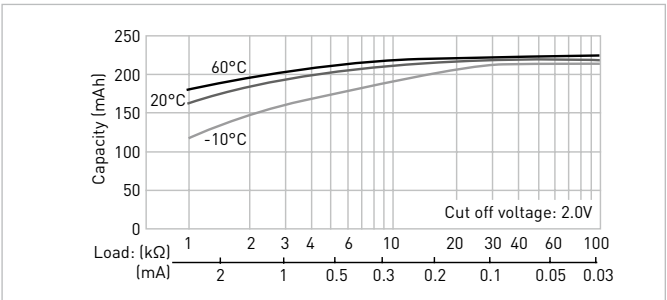

Lithium battery holders for CR-2032

These battery holders are designed for sure and easy load-ing/removal of Panasonic coin type Lithium batteries in/from equipment enabling the batteries to fully exploit their capa-bilities as the back-up power supply in C-MOS RAM memory and microcomputer memory. All of the battery holders are designed to prevent inverted insertion of

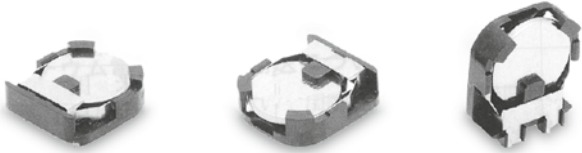


BCR20H4


BCR20H5

BCR20V4


BCR20H4 (3 terminals)

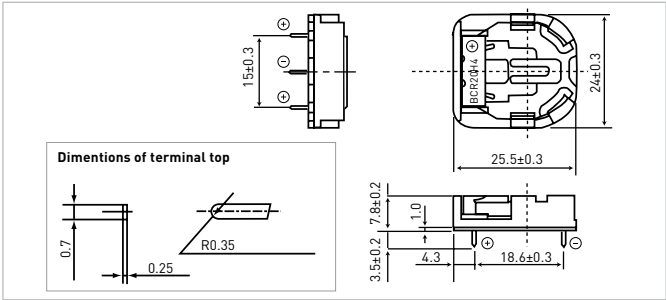

BCR20H5 (2 terminals)

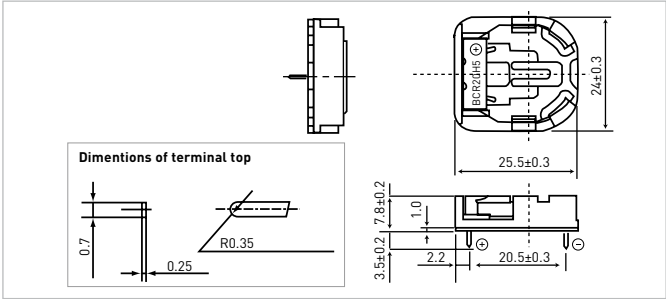

BCR20V4 (3 terminals)

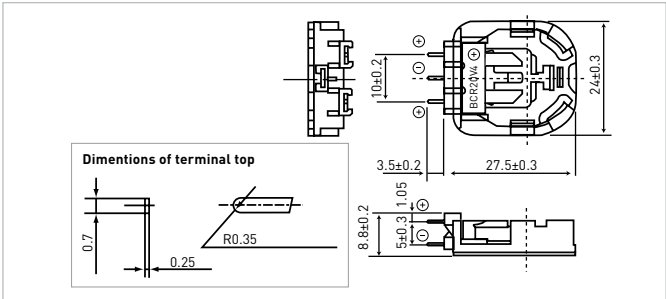

Precaution for washing battery holders

The battery holders can be adversely affected by some deter-gents use in the circuit board washing process and may result in cracks forming in the holder. Please test the holders in your washing process before use.

The data in this document are for descriptive purposes only and are not intended to make or imply any guarantee or warranty.

*1 Voltage at 50% discharge depth.