

battery type: Lithium primary battery
battery size: ER34615H (D)
chemical system: Lithium Thionyl Chloride Battery

conditions, remarks
 typical values for batteries stored for 1 year at max. 30°C


nominal voltage: 3.6 V
open circuit voltage: > 3.64 V new battery

capacity
 nominal: 19000 mAh discharge at 1mA constant; 24hours/day; end voltage (EV):2.0V
 min. operation time: ≥ 320 h at 62 Ω load; 24h/d; EV: 2.0V (for IQC measurement)


discharge
 max. continuous current: 150 mA (achievable capacity approx. 50% when discharge to 2.0V, ta: 25°C)
 max. pulse current: 300 mA 0.1s pulses every 2 minutes
 load voltage (CCV): ≥ 3.25 V at 62 Ω load (for IQC measurement)

ambient temperature range: - 55...85 °C operating temperature
 5...20 °C recommended storage temperature


Discharge Characteristics at 25°C

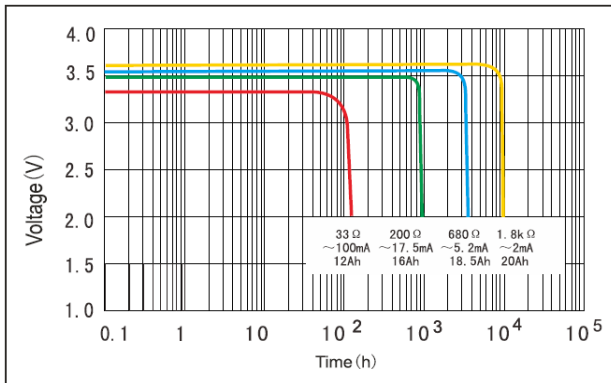


Voltage - Temperature

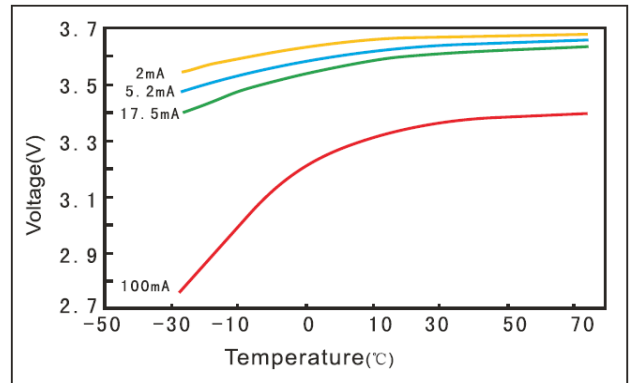

Capacity - Discharge Current (E.V. 2.0V)

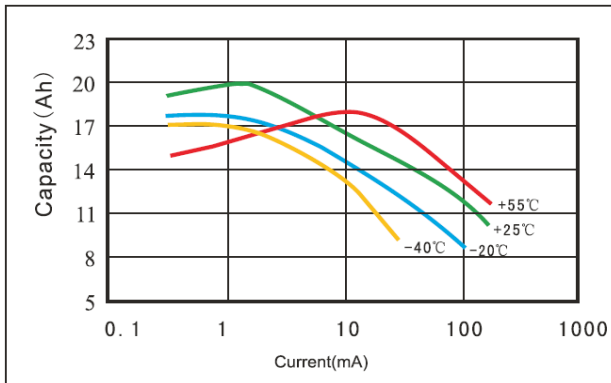


Discharge Characteristics after storage

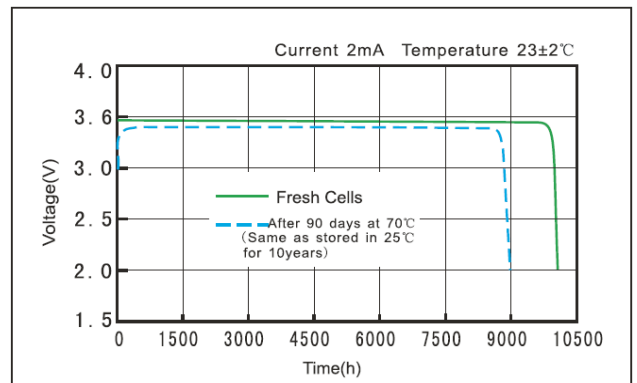

mechanical specifications

cell dimensions:

weight: 103 ± 4 g



dimensions in mm



ANSMANN Specifications for model:	Lithium Thionyl Chloride Battery ER34615H
data sheet no. / part no.	
s.n.	704667
author / date	TG / 31.08.2023